


**SPIGOT & SOCKET PRESSURE & NON-PRESSURE PIPES - SANS 676 & 677  
WITH SACRIFICIAL LAYER**

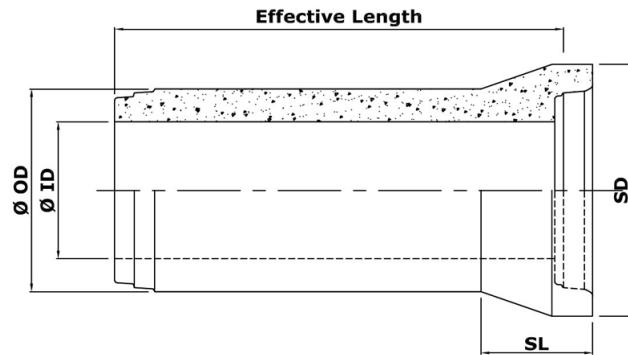

**Notes:**

1. Pipe sizes shown below are for standard pipes.
2. Special pipes with different ID, lengths, deflections, classes etc, are available on request.
3. For short radius curves, deflected spigots ND 600 to 1200 and deflected sockets ND 1350 and above are available on request
4. From ND 600 to 1200 CAC sacrificial layer available

\* Masses are estimated \*

Pipe Class	ND	ID	OD	T	SD	SL	Effective Length	Maximum Deflection	Mass	
									per 1m	per pipe
	mm	mm	mm	mm	mm	mm	mm	°	kg/m	kg
ALL CLASSES	300	274	382	54	480	223	2360	1.5°	153	361
	375	350	457	54	560	223	2360	1.5°	194	459
	450	424	538	57	660	253	2360	1.5°	250	590
	525	500	621	61	745	255	2360	1.5°	309	728
	600	574	708	67	842	279	2935	1.5°	385	1131
	675	650	791	71	925	284	2935	1°	454	1333
	750	724	878	77	1028	311	2935	1°	541	1589
	825	800	969	85	1132	338	2935	1°	669	1965
	900	858	1056	99	1233	366	2935	1°	845	2479
	1050	1004	1230	113	1428	404	2935	1°	1131	3319
	1200	1154	1400	123	1590	412	2917	1°	1451	4232
	1350	1350	1630	140	1770	348	2935	1°	1802	5288
	1500	See In the Wall Joint pipes								
	1650	See In the Wall Joint pipes								
1800	See In the Wall Joint pipes									
2000	2000	2400	200	2460	302	3000	0.75°	3674	11021	
2300	See In the Wall Joint pipes									