


**PRECAST CONCRETE MANHOLES SECTIONS AND SLABS - SANS 1294**



\* Masses are estimated \*

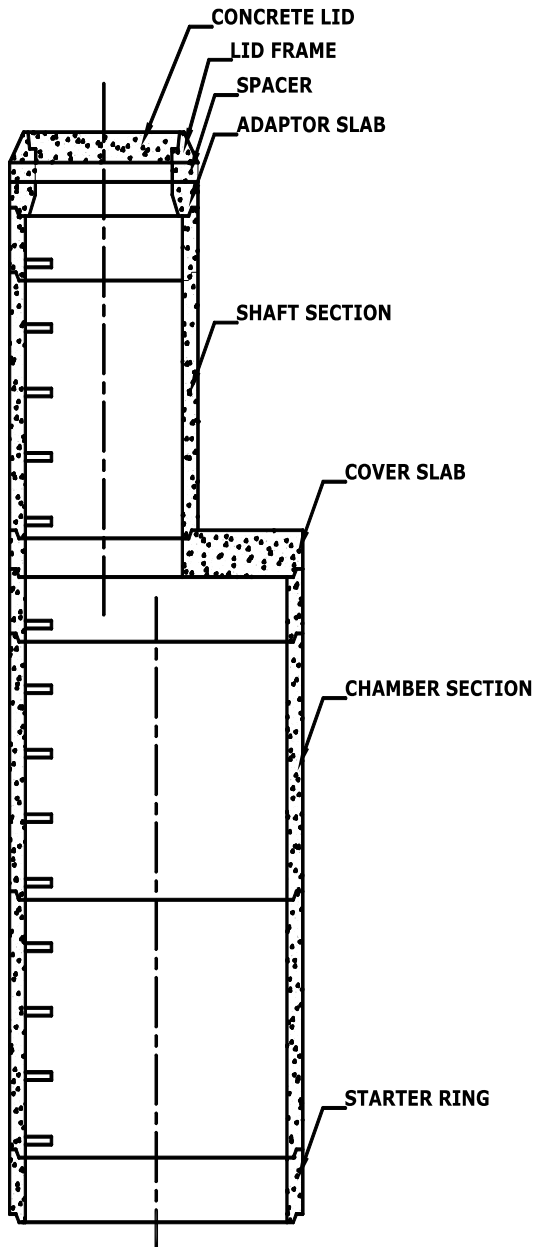

CHAMBER & SHAFTS SECTIONS						
ND	ID	OD	Thickness	Effective Height	Mass	
					per lm	per section
mm	mm	mm	mm	mm	kg/m	kg
750	750	860	55	250	360	89
				500		178
				1000		355
1000	1000	1130	65	250	560	139
				500		278
				1000		555
1250	1250	1400	75	250	800	200
				500		400
				1000		800
1500	1500	1670	85	250	1080	270
				500		540
				1000		1080
1750	1750	1940	95	250	1380	345
				500		690
				1000		1380

COVER SLABS			
With 560 holes for lid frames or with recess for lids (Ekengala slabs)			
ND	Reduce to	Thickness	Mass
mm	mm	mm	kg
1000	560/Lid	150	289
1250	560/Lid	150	494
1500	560/Lid	150	744
1750	560/Lid	175	1186

ROUND SPACER		
ND	Thickness	Mass
mm	mm	kg
750	75	64

LID FRAME		
ND	Thickness	Mass
mm	mm	kg
750	125	90

ADAPTOR SLABS			
ND	Reduce to	Thickness	Mass
mm	mm	mm	kg
750	560	118	100

LID (Medium or Heavy Duty)		
ND	Thickness	Mass
mm	mm	kg
560	125	90

REDUCER SLABS			
ND	Reduce to	Thickness	Mass
mm	mm	mm	kg
1000	750	150	215
1250	750	150	420
1500	750	150	670
1750	750	175	1100

OTHER PRODUCTS
Available on request

- Square manholes
- Precast bases
- Special purpose slabs